



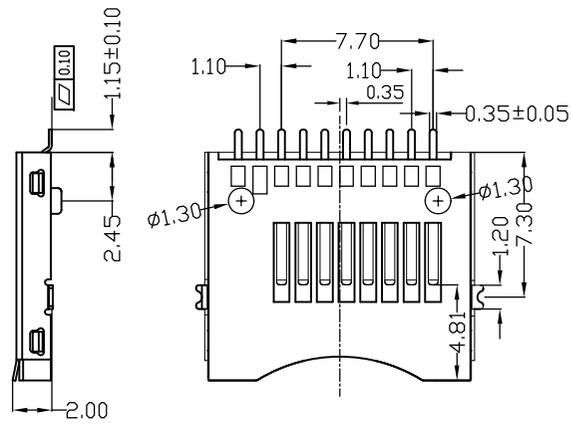



REV.	ECN NO OR DESCRIPTION	REVISED	DATE

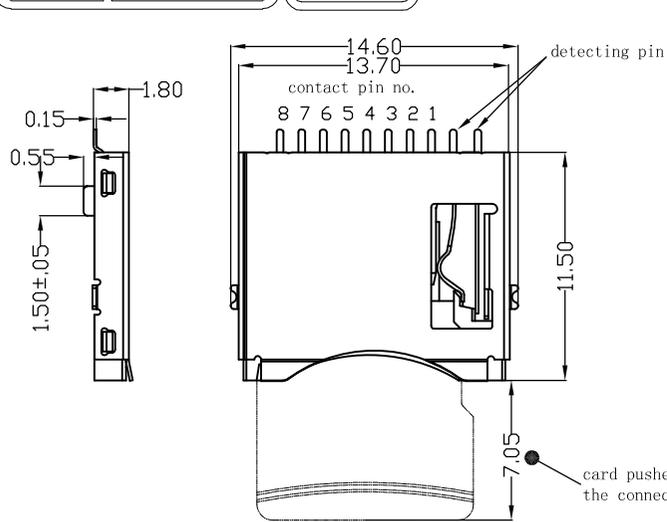


Specification:

- Electrical Characteristics:  
 Contact Current Rating: 0.5 Amperes.  
 Dielectric Withstanding Voltage: AC500V r.m.s  
 Insulation Resistance: 1000 MΩ Minimum  
 Contact Resistance: 40mΩ Maximum
- Environmental:  
 Operating Temperature: -20°~+60°

3. MAJOR DIM: ▼  
 WOTHOUT CARD, SWITCH OPENED IN THE CONNECTOR;  
 WHEN CARD PUSHED-IN, SWITCH WAS CLOSED

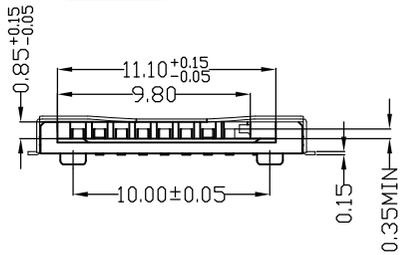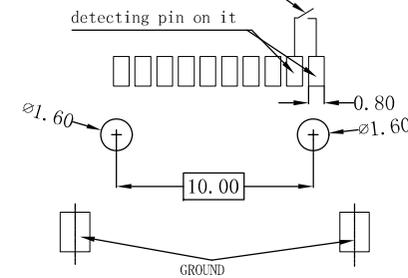

Pin No.	NAME	TYPE
1	DAT 2	I/O/PP
2	CD/DAT 3	I/O/PP
3	CMD	PP
4	VDD	S
5	CLK	I
6	VSS	S
7	DAT0	I/O/PP
8	DAT1	I/O/PP

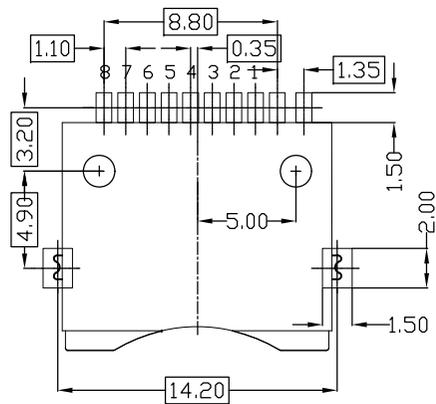

RECOMMENED P. C. B LAYOUT (TOP VIEW)  
 GENERAL TOLERANCE ±0.05

ITEM	PART NAME	Q'TY	MATERIAL
①	TF01 Housing	1PCS	LCP 473i Black
②	TF01 Contact	1SET	C5191R-EH T=0.15mm
③	TF01-*1-4000 Shell	1PCS	SPCC T=0.15mm
	TF01-*1-4001 Shell	1PCS	C2680R-H T=0.15mm

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS: X :±0.5 X.X :±0.20 X.XX :±0.10  
 ANGLES: X :±2° X.X :±1°

**东莞市汉博电子科技有限公司**  
 DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE: TF简易抽拉式

DWN	xiong	PART NO. TF-013	
CHKD	lee	SCALE: 1:1	UNIT: mm
APVD	wang	SIZE: A4	SHEET: 10F 1

CUSTOMER COPY