



REV.	ECN NO OR DESCRIPTION	REVISED	DATE

NOTES:

1.) MATERIAL:


- 1-1. HOUSING AND COVER:LCP,UL 94V-0,COLOR:BLACK; HF
- 1-2. CONTACT:BRASS T=0.20;
- 1-3. SHELL:BRASS T=0.50;
- 1-4. CAP: LCP BLACK UL 94-V0

2.) FINISH:

- 2-1. CONTACT: Au PLATING ON CONTACT AREA,(SEE P/N DESCRIBING) AU G/F PLATING ON SOLDER TAILS,50u" MIN. Ni UNDERPLATING OVERALL;
- 2-2. SHELL: PLATING Ni 50u" MIN.

3.) SPECIFICATIONS:

- 3-1. VOLTAGE RATING: 40V
- 3-2. CURRENT RATING: 0.5A
- 3-3. INSULATION RESISTANCE: 100MEG.OHM MIN
- 3-4. CONTACT RESISTANCE: 30 MILL.OHM MAX
- 3-5. OPERATION TEMPERATURE: -20° TO +85°
- 3-6. INSERT FORCE: 44.1N MAX
- 3-7. EXTRACT FORCE: 9.8N MIN
- 3-8. DURABILITY: 10000 CYCLES

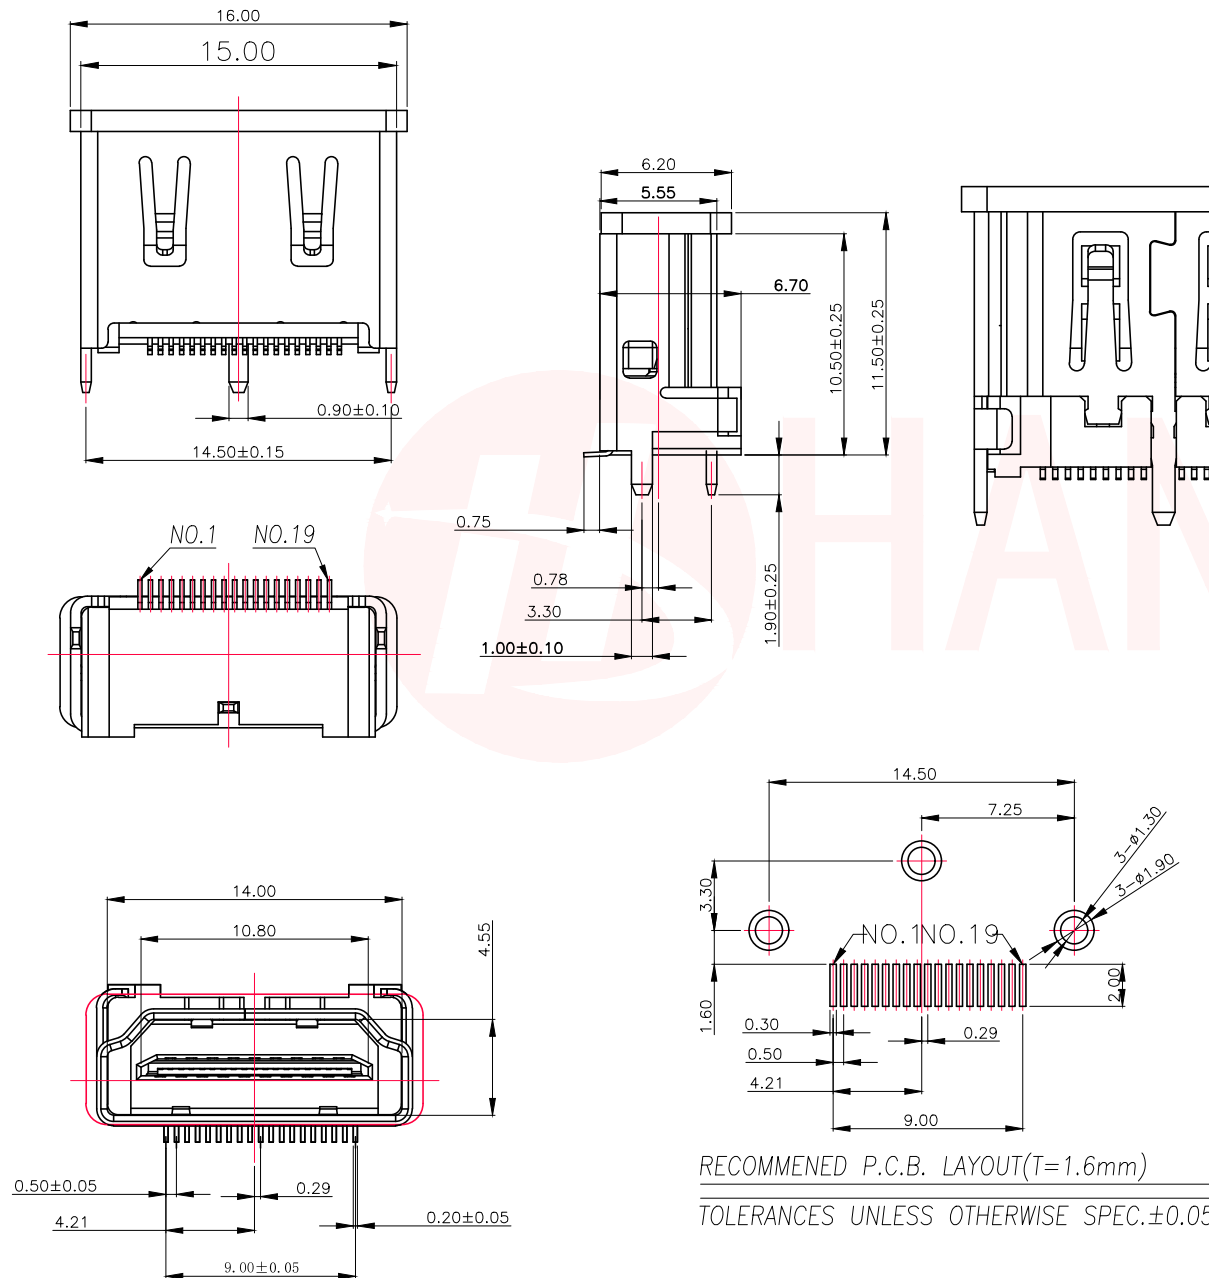

RECOMMENED P.C.B. LAYOUT(T=1.6mm)

TOLERANCES UNLESS OTHERWISE SPEC.±0.05

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.35	X :±2°
X.X :±0.25	X.X :±1°
X.XX :±0.15	



东莞市汉博电子科技有限公司
DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE	TYPE A HDMI 直立式 10.5H			
DWN	xiong	PART NO. HDMI-224-H105		
CHKD	lee	SCALE:1:1	UNIT: mm	
APVD	wang	SIZE: A4	SHEET:10F 1	

CUSTOMER COPY