


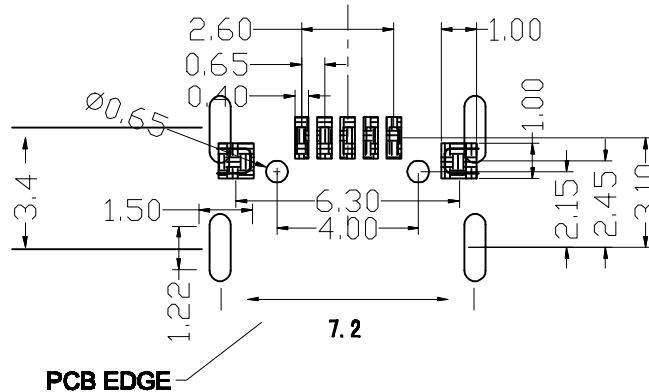
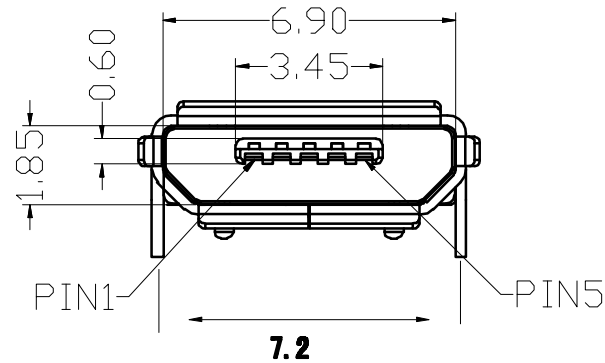


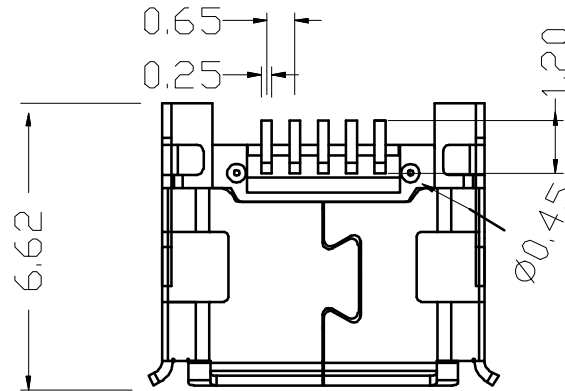

REV.	ECN NO OR DESCRIPTION	REVISED	DATE

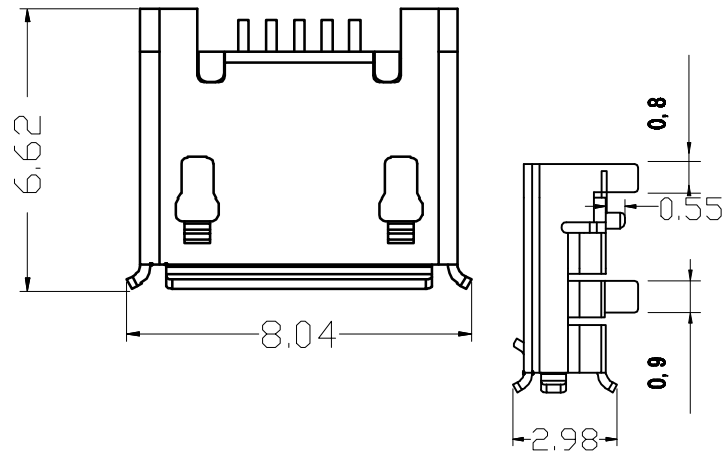

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05

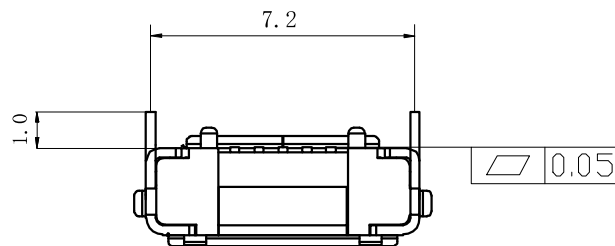

规格说明: Specifications;
电气特性: Electrical;

- 额定电流: Current Rating
1.0A/contact terminal
 - 额定电压: Voltage Rating 30V DC
 - 接触阻抗: Contact Resistance
50 milliohms MAX
 - 耐电压: Dielectric Withstanding Voltage;
300 V AC AT Sea Level
 - 绝缘阻抗: Insulation Resistance;
100MEGA ohms MIN
- 物理性能: Mechanical;
- 插拔力: Connect Mate and unmate Force
Mate force; 3.0kgf (MAX)
Unmate force; 0.7kgf (MIN)
 - 端子保持力: Terminal Retention 0.5kgf (MIN)
- 原材料: Material;
- 塑胶: Housing:
Housing Temperature Thermoplastics,
UL 94V-0 LCP Black
 - 端子: Contact: Copper Alloy C2680
 - 外壳: Shell: H 65
- 电镀: Finish;
- 端子: Contact: Plated Gold in Mating Area;
Tin on solder tails
 - 外壳: Shell: Nickel Plating (能过炉自动上锡)

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS: ANGLES:
X : ±0.35 X : ±2°
X.X : ±0.25 X.X : ±1°
X.XX : ±0.15



东莞市汉博电子科技有限公司
DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE	MICRO USB 四脚插件卷边			
DWN	xiong	PART NO.	MC-604-AJT	
CHKD	lee	SCALE: 1:1	UNIT: mm	⊙
APVD	wang	SIZE: A4	SHEET: 1 OF 1	REV: A4
CUSTOMER COPY				