


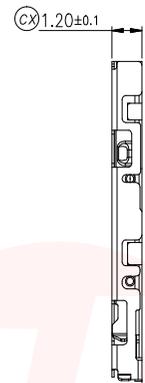


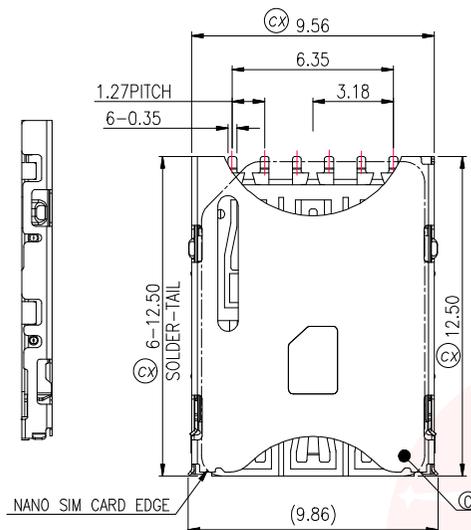



REV.	ECN NO OR DESCRIPTION	REVISED	DATE



ALL SOLDER-TAIL
 端子焊脚平面度: 0.08MM
 外壳焊脚平面度: 0.08MM



NANO SIM CARD PAD

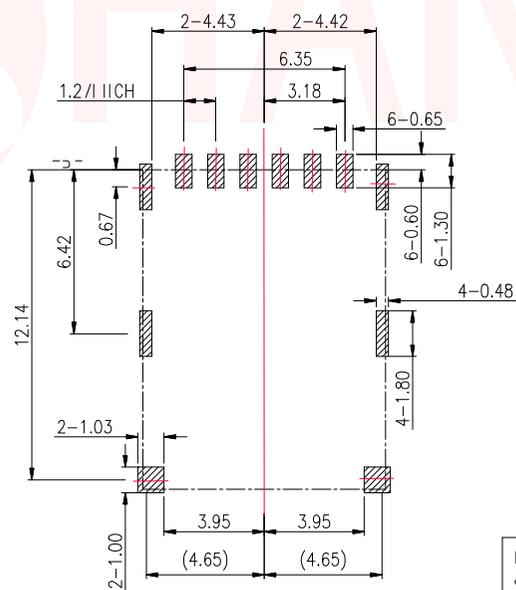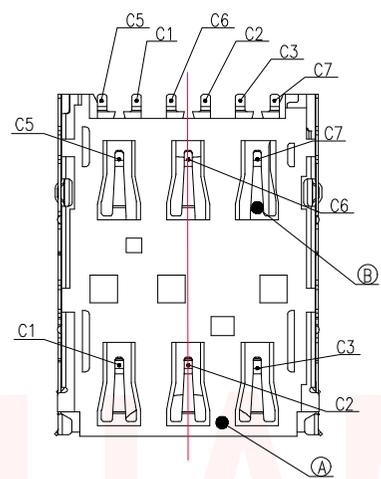

RECOMMENDED P.C.B. LAYOUT
 TOLERANCE (TOP VIEW) ±0.05mm

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 1A .
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V R.M.S MIN;
 - INSULATION RESISTANCE: 500MΩ MIN.
 - CONTACT RESISTANCE: 100mΩ MAX.(INITIAL)
- LIFE TEST: 1500 CYCLES .
- OTHER GENERAL SPEC. TO REFER "2SM201-000111F SPEC".
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT: ©
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- PACKAGING: TAPE & REEL.
- © REPRESENT CRITICAL DIMENSIONS.
- ∇ REPRESENT CPK DIMENSIONS.

C	SHELL	1	STAINLESS STEEL, 0.10T	NICKEL PLATING OVER ALL
B	CONTACT	1	COPPER ALLOY, 0.10T	GOLD FLASH ON CONTACT AREA AND SOLDER AREA 50u" MIN NICKEL UNDER-PLATED
A	HOUSING	1	HIGH TEMP. THERMOPLASTIC UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X : ±0.30	X : ±2°
X.X : ±0.20	X.X : ±1°
X.XX : ±0.10	

东莞市汉博电子科技有限公司
 DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE	NANO SIM SMT type 直插式1.20H			
DWN	xiong	PART NO. SNO-1440		
CHKD	lee	SCALE: 1:1	UNIT: mm	
APVD	wang	SIZE: A4	SHEET: 10F 1	REV: A4

CUSTOMER COPY